

Binary Acoustic Technology

Digital Acoustic Processing

www.binaryacoustictech.com

SP-01 Super Tweeter

Product description:

The SP-01 is the first of Binary Acoustic Technologies SP series super tweeters. It offers a nearly flat response over the 1KHz to 110KHz range. This makes it suitable for a wide variety of bio-acoustic applications.

The SP-01 is intended to be used with Binary Acoustic Technologies DPA20-SP ultrasonic generator. It includes a 1/4-20 mounting thread so that it can be attached to a camera tripod.

Specifications:

Frequency Range : 1KHz to 110 KHz
Maximum Power Handling : 160 Watts
Sensitivity : 94 dB SPL / Watt at 1 meter

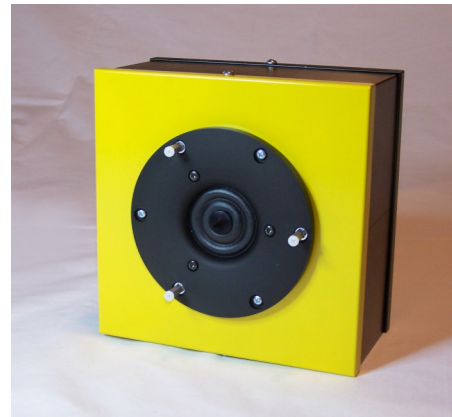


Figure 1: SP-01 Super Tweeter

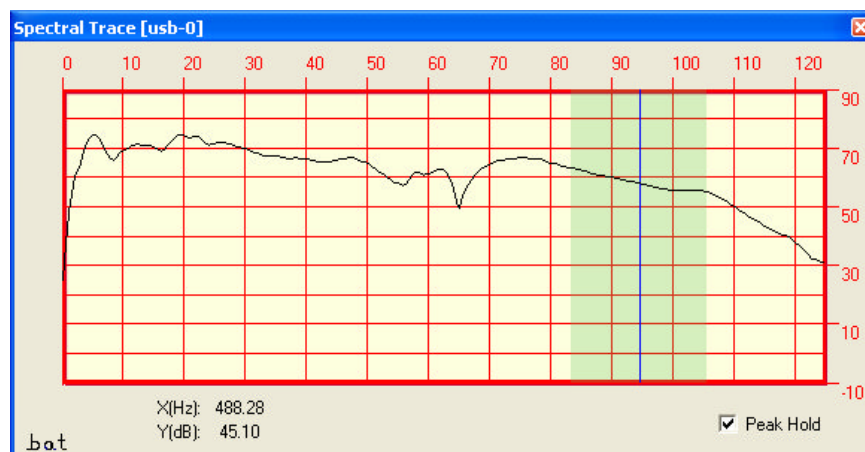


Figure 2: Typical Frequency Response

Contact information:

Information : info@binaryacoustictech.com
Sales: sales@binaryacoustictech.com